




# UGE BEARING INDUSTRIAL CO., LTD.

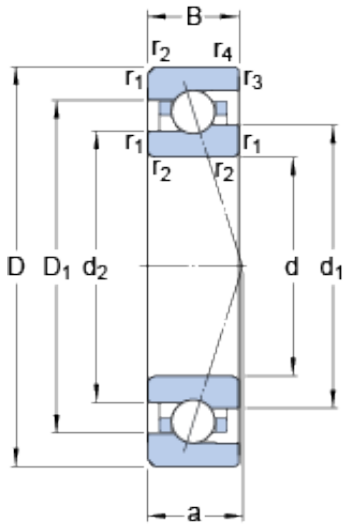

## 120 mm x 180 mm x 28 mm SKF 7024 CE/P4A Low Heat Generation Precision Bearings

Bearing No. 7024 CE/P4A

7024 CE/P4A Bearing 2D drawings and 3D CAD models

Size	180x120x28 mm
Bore Diameter	180 mm
Outer Diameter	120 mm
Width	28 mm
d	120 mm
D	180 mm
B	28 mm
d <sub>1</sub>	141.42 mm
d <sub>2</sub>	137.8 mm
D <sub>1</sub>	158.61 mm
r <sub>1,2</sub> - min.	2 mm
r <sub>3,4</sub> - min.	1 mm
a	34.3 mm
d <sub>a</sub> - min.	128.8 mm
d <sub>b</sub> - min.	128.8 mm
D <sub>a</sub> - max.	171.2 mm
D <sub>b</sub> - max.	174.4 mm
r <sub>a</sub> - max.	2 mm
r <sub>b</sub> - max.	1 mm
d <sub>n</sub>	144.9 mm
Basic dynamic load rating - C	57.2 kN
Basic static load rating - C <sub>0</sub>	55 kN
Fatigue load limit - P <sub>u</sub>	1.9 kN
Limiting speed for grease	9300 r/min



## UGE BEARING INDUSTRIAL CO., LTD.

Lubrication	
Limiting speed for oil lubrication	14500 mm/min
Ball - $D_w$	14.288 mm
Ball - $z$	29
$G_{ref}$	28 cm <sup>3</sup>
Calculation factor - $f_0$	9.6
Preload class A - $G_A$	310 N
Preload class B - $G_B$	930 N
Preload class C - $G_C$	1850 N
Calculation factor - $f$	1.12
Calculation factor - $f$	1
Calculation factor - $f_{2A}$	1
Calculation factor - $f_{2B}$	1.03
Calculation factor - $f_{2C}$	1.05
Calculation factor - $f_{HC}$	1
Preload class A	104 N/micron
Preload class B	164 N/micron
Preload class C	225 N/micron
$d_1$	141.42 mm
$d_2$	137.8 mm
$D_1$	158.61 mm
$r_{1,2}$ min.	2 mm
$r_{3,4}$ min.	1 mm
$d_a$ min.	128.8 mm
$d_b$ min.	128.8 mm
$D_a$ max.	171.2 mm
$D_b$ max.	174.4 mm
$r_a$ max.	2 mm
$r_b$ max.	1 mm
$d_n$	144.9 mm



## UGE BEARING INDUSTRIAL CO., LTD.

Basic dynamic load rating C	57.2 kN
Basic static load rating $C_0$	55 kN
Fatigue load limit $P_u$	1.9 kN
Attainable speed for grease lubrication	9300 r/min
Attainable speed for oil-air lubrication	14500 r/min
Ball diameter $D_w$	14.288 mm
Number of balls z	29
Reference grease quantity $G_{ref}$	28 cm <sup>3</sup>
Preload class A $G_A$	310 N
Static axial stiffness, preload class A	104 N/ $\mu$ m
Preload class B $G_B$	930 N
Static axial stiffness, preload class B	164 N/ $\mu$ m
Preload class C $G_C$	1850 N
Static axial stiffness, preload class C	225 N/ $\mu$ m
Calculation factor f	1.12
Calculation factor $f_1$	1
Calculation factor $f_{2A}$	1
Calculation factor $f_{2B}$	1.03
Calculation factor $f_{2C}$	1.05
Calculation factor $f_{HC}$	1
Calculation factor $f_0$	9.6
Mass bearing	2.17 kg